


GM2306

SOT-23 場效應晶體管(SOT-23 Field Effect Transistors)

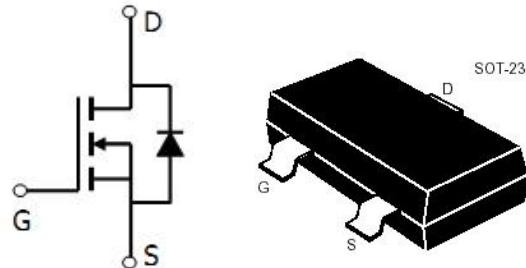

N-Channel Enhancement-Mode MOS FETs

N 溝道增強型 MOS 場效應管

■MAXIMUM RATINGS 最大額定值

Characteristic 特性參數	Symbol 符號	Max 最大值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	BV_{DSS}	20	V
Gate- Source Voltage 柵極-源極電壓	V_{GS}	± 10	V
Drain Current (continuous) 漏極電流-連續	I_D	4	A
Drain Current (pulsed) 漏極電流-脉沖	I_{DM}	15	A
Total Device Dissipation 總耗散功率 $T_A=25^\circ\text{C}$ 環境溫度為 25°C	P_D	1200	mW
Junction 結溫	T_J	150	$^\circ\text{C}$
Storage Temperature 儲存溫度	T_{stg}	-55 to +150	$^\circ\text{C}$

■DEVICE MARKING 打標

GM2306=A6

GM2306

ELECTRICAL CHARACTERISTICS 電特性

($T_A=25^\circ\text{C}$ unless otherwise noted 如無特殊說明，溫度為 25°C)

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓($I_D = 250\mu\text{A}, V_{GS}=0\text{V}$)	BV_{DSS}	20	—	—	V
Gate Threshold Voltage 柵極開啓電壓($I_D = 250\mu\text{A}, V_{GS} = V_{DS}$)	$V_{GS(\text{th})}$	0.5	—	1.5	V
Diode Forward Voltage Drop 內附二極管正向壓降($I_S=0.75\text{A}, V_{GS}=0\text{V}$)	V_{SD}	—	—	1.5	V
Zero Gate Voltage Drain Current 零柵壓漏極電流($V_{GS}=0\text{V}, V_{DS}= 16\text{V}$) ($V_{GS}=0\text{V}, V_{DS}= 16\text{V}, T_A=55^\circ\text{C}$)	I_{DSS}	—	—	1 10	μA
Gate Body Leakage 柵極漏電流($V_{GS}=\pm 8\text{V}, V_{DS}=0\text{V}$)	I_{GSS}	—	—	± 100	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻($I_D = 4\text{A}, V_{GS} = 4.5\text{V}$)	$R_{DS(\text{ON})}$	—	30	40	$\text{m}\Omega$
Static Drain-Source On-State Resistance 靜態漏源導通電阻($I_D = 2\text{A}, V_{GS} = 2.5\text{V}$)	$R_{DS(\text{ON})}$	—	45	60	$\text{m}\Omega$
Input Capacitance 輸入電容 ($V_{GS}=0\text{V}, V_{DS}= 10\text{V}, f=1\text{MHz}$)	C_{ISS}	—	600	—	pF
Output Capacitance 輸出電容 ($V_{GS}=0\text{V}, V_{DS}= 10\text{V}, f=1\text{MHz}$)	C_{OSS}	—	120	—	pF
Reverse Transfer Capacitance 回饋電容 ($V_{GS}=0\text{V}, V_{DS}=10\text{V}, f=1\text{MHz}$)	C_{RSS}	—	60	—	pF
Total Gate Charge 柵極電荷密度 ($V_{DS}=15\text{V}, I_D=1\text{A}, V_{GS}=5\text{V}$)	Q_g	—	4	—	nC
Turn-ON Time 开啓時間 ($V_{DS}= 10\text{V}, I_D= 3\text{A}, R_{\text{GEN}}=6\Omega$)	$t_{(\text{on})}$	—	8	—	ns
Turn-OFF Time 短斷時間 ($V_{DS}= 10\text{V}, I_D= 3\text{A}, R_{\text{GEN}}=6\Omega$)	$t_{(\text{off})}$	—	60	—	ns

Pulse Width $\leq 300 \mu\text{s}$; Duty Cycle $\leq 2.0\%$

GM2306

■TYPICAL CHARACTERISTIC CURVE

典型特性曲线

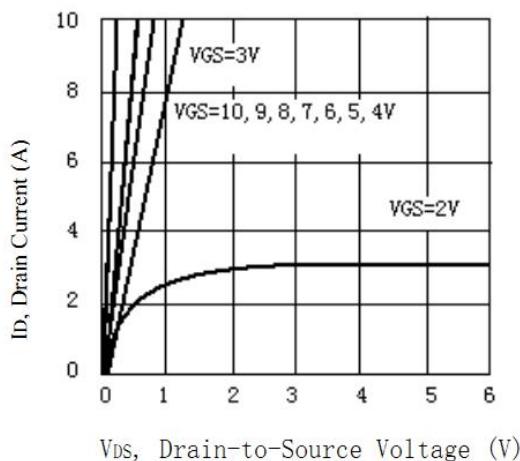


Fig 1: Output Characteristics

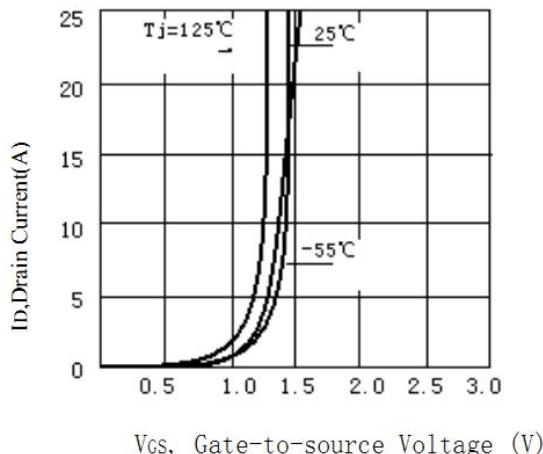


Figure 2: Transfer Characteristics

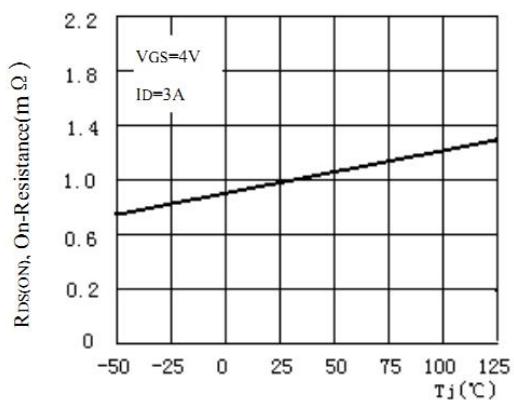


Figure 3: On-Resistance vs. Temperature

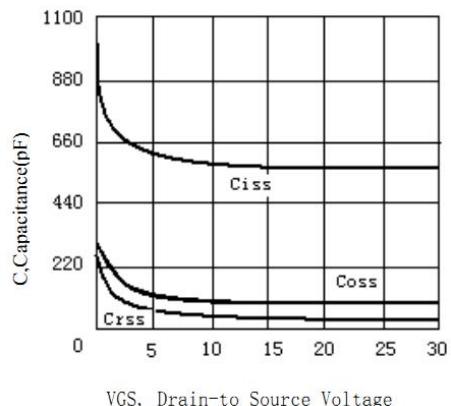


Figure 4: Capacitance vs. Gate-Source Voltage

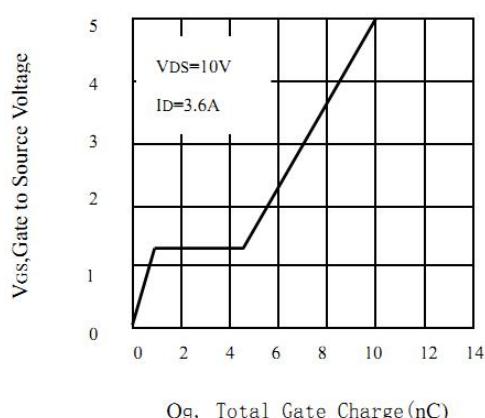


Figure 5: Gate-Charge Characteristics

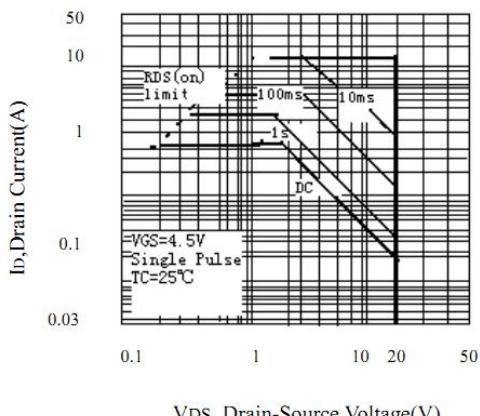


Figure 6: Safe Operating Area