


GM3403

SOT-23 場效應晶體管(SOT-23 Field Effect Transistors)

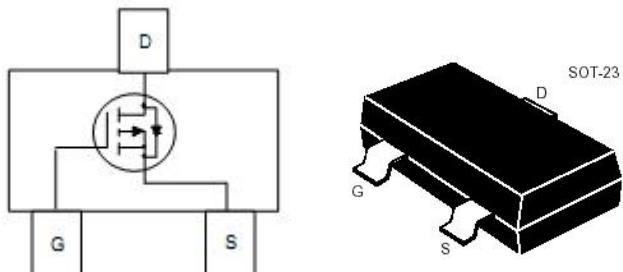

### P-Channel Enhancement-Mode MOS FETs

P 溝道增強型 MOS 場效應管

#### ■MAXIMUM RATINGS 最大額定值

Characteristic 特性參數	Symbol 符號	Rat 額定值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	$BV_{DSS}$	-30	V
Gate- Source Voltage 柵極-源極電壓	$V_{GS}$	$\pm 12$	V
Drain Current (continuous) 漏極電流-連續	$I_D$	-2.6	A
Drain Current (pulsed) 漏極電流-脉冲	$I_{DM}$	-10	A
Total Device Dissipation 總耗散功率	$P_D$	1100	mW
TA=25°C 環境溫度為 25°C			
Junction 結溫	$T_J$	150	°C
Storage Temperature 儲存溫度	$T_{stg}$	-55 to +150	°C

#### ■DEVICE MARKING 打標

GM3403=B3
-----------

GM3403

**ELECTRICAL CHARACTERISTICS 電特性**

( $T_A=25^\circ\text{C}$  unless otherwise noted 如無特殊說明，溫度為  $25^\circ\text{C}$ )

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓( $I_D = -250\mu\text{A}, V_{GS}=0\text{V}$ )	BVDSS	-30	—	—	V
Gate Threshold Voltage 柵極開啓電壓( $I_D = -250\mu\text{A}, V_{GS} = V_{DS}$ )	$V_{GS(\text{th})}$	-0.6	-1	-1.4	V
Diode Forward Voltage Drop 內附二極管正向壓降( $I_S = -1\text{A}, V_{GS}=0\text{V}$ )	VSD	—	—	-1	V
Zero Gate Voltage Drain Current 零柵壓漏極電流( $V_{GS}=0\text{V}, V_{DS} = -24\text{V}$ ) ( $V_{GS}=0\text{V}, V_{DS} = -24\text{V}, T_A=55^\circ\text{C}$ )	IDSS	—	—	-1 -5	$\mu\text{A}$
Gate Body Leakage 柵極漏電流( $V_{GS}=\pm 12\text{V}, V_{DS}=0\text{V}$ )	IGSS	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D = -2.6\text{A}, V_{GS} = -10\text{V}$ )	$R_{DS(\text{ON})}$	—	—	115	$\text{m}\Omega$
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D = -2\text{A}, V_{GS} = -4.5\text{V}$ )	$R_{DS(\text{ON})}$	—	—	150	$\text{m}\Omega$
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D = -1\text{A}, V_{GS} = -2.5\text{V}$ )	$R_{DS(\text{ON})}$	—	—	200	$\text{m}\Omega$
Input Capacitance 輸入電容 ( $V_{GS}=0\text{V}, V_{DS} = -15\text{V}, f=1\text{MHz}$ )	CISS	—	260	—	pF
Output Capacitance 輸出電容 ( $V_{GS}=0\text{V}, V_{DS} = -15\text{V}, f=1\text{MHz}$ )	COSS	—	37	—	pF
Turn-ON Time 开啓時間 ( $V_{DS} = -15\text{V}, V_{GS} = -10\text{V}, R_{GEN}=6\Omega$ )	$t_{(\text{on})}$	—	6	—	ns
Turn-OFF Time 矩斷時間 ( $V_{DS} = -15\text{V}, V_{GS} = -10\text{V}, R_{GEN}=6\Omega$ )	$t_{(\text{off})}$	—	20	—	ns

Pulse Width  $\leq 300 \mu\text{s}$ ; Duty Cycle  $\leq 2.0\%$