

N-channel 30V, 62A, TO-252 Power MOSFET 功率場效應管

■Features 特點

Low on-resistance and maximum DC current capability 低導通電阻和最大直流電流能力

Super high density cell design 超高元胞密度設計

$R_{DS(ON)} \leq 6.6\text{m}\Omega @ V_{GS} = 10\text{V}$

$R_{DS(ON)} \leq 11\text{m}\Omega @ V_{GS} = 4.5\text{V}$

■Applications 應用

Power Management in Note book 筆記本電源管理


Portable Equipment 便攜式設備

Battery Powered System 電池電源系統

DC/DC Converter 直流/直流變換

Load Switch 負載開關應用

■Internal Schematic Diagram 內部結構

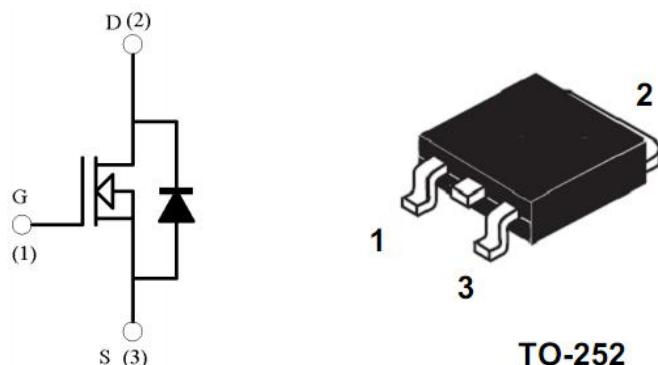

■Absolute Maximum Ratings 最大額定值







Characteristic 特性參數	Symbol 符號	Rating 額定值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	BV_{DSS}	30	V
Gate- Source Voltage 楞極-源極電壓	V_{GS}	± 20	V
Drain Current (continuous) 漏極電流-連續	I_D (at $T_C = 25^\circ\text{C}$)	62	A
Drain Current (pulsed) 漏極電流-脈沖	I_{DM}	140	A
Total Device Dissipation 總耗散功率	P_{TOT} (at $T_C = 25^\circ\text{C}$)	31	W
Thermal Resistance Junction-Ambient 热阻	$R_{\Theta JA}$	50	$^\circ\text{C}/\text{W}$
Junction/Storage Temperature 結溫/儲存溫度	T_J, T_{stg}	-55~150	$^\circ\text{C}$

■ Electrical Characteristics 電特性

($T_A=25^\circ\text{C}$ unless otherwise noted 如無特殊說明，溫度為 25°C)

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓($I_D=250\mu\text{A}, V_{GS}=0\text{V}$)	BV_{DSS}	30	—	—	V
Gate Threshold Voltage 柵極開啓電壓($I_D=250\mu\text{A}, V_{GS}=V_{DS}$)	$V_{GS(\text{th})}$	1	2	3	V
Zero Gate Voltage Drain Current 零柵壓漏極電流($V_{GS}=0\text{V}, V_{DS}=30\text{V}$)	I_{DSS}	—	—	1	μA
Gate Body Leakage 柵極漏電流($V_{GS}=\pm20\text{V}, V_{DS}=0\text{V}$)	I_{GSS}	—	—	± 100	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻($I_D=30\text{A}, V_{GS}=10\text{V}$) ($I_D=30\text{A}, V_{GS}=4.5\text{V}$)	$R_{DS(\text{ON})}$	—	5.5 9	6.6 11	$\text{m}\Omega$
Source Drain Current 源極-漏極電流	I_{SD}	—	—	70	A
Diode Forward Voltage Drop 內附二極管正向壓降($I_{SD}=20\text{A}, V_{GS}=0\text{V}$)	V_{SD}	—	—	1.3	V
Input Capacitance 輸入電容 ($V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$)	C_{ISS}	—	2465	—	pF
Common Source Output Capacitance 共源輸出電容($V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$)	C_{OSS}	—	330	—	pF
Reverse Transfer Capacitance 回饋電容($V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$)	C_{RSS}	—	140	—	pF
Total Gate Charge 總柵極電荷密度 ($V_{DS}=15\text{V}, I_D=16\text{A}, V_{GS}=10\text{V}$)	Q_g	—	5.5	—	nC
Gate Source Charge 柵源電荷密度 ($V_{DS}=15\text{V}, I_D=16\text{A}, V_{GS}=5\text{V}$)	Q_{gs}	—	5.2	—	nC
Gate Drain Charge 柵漏電荷密度 ($V_{DS}=15\text{V}, I_D=16\text{A}, V_{GS}=5\text{V}$)	Q_{gd}	—	3.2	—	nC
Turn-On Delay Time 開啓延遲時間 ($V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$)	$t_{d(\text{on})}$	—	15	—	ns
Turn-On Rise Time 開啓上升時間 ($V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$)	t_r	—	5	—	ns
Turn-Off Delay Time 關斷延遲時間 ($V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$)	$t_{d(\text{off})}$	—	51	—	ns
Turn-On Fall Time 開啓下降時間 ($V_{DS}=15\text{V}, I_D=1\text{A}, R_{GEN}=6\Omega, V_{GS}=10\text{V}$)	t_f	—	10	—	ns


■ TYPICAL CHARACTERISTIC CURVE 典型特性曲线

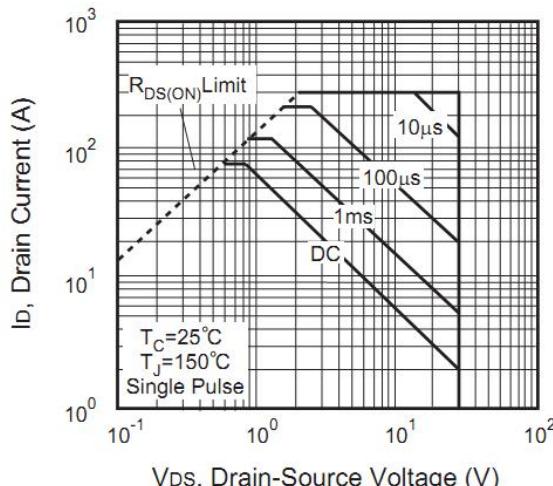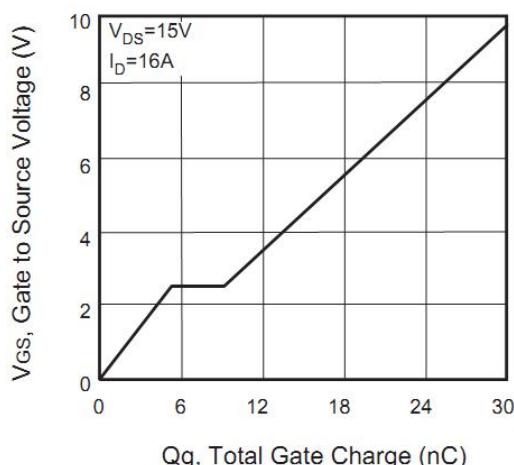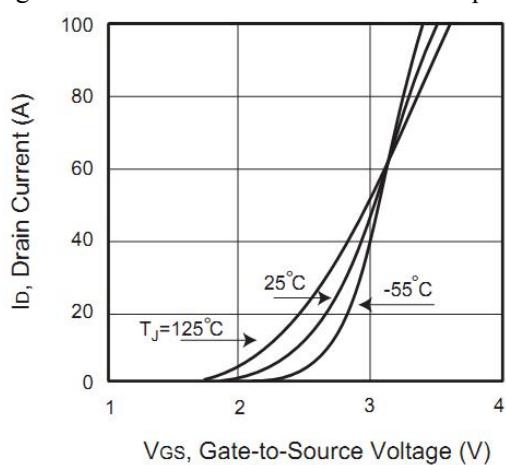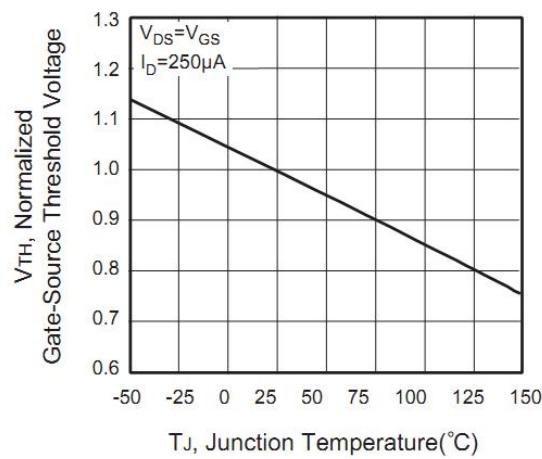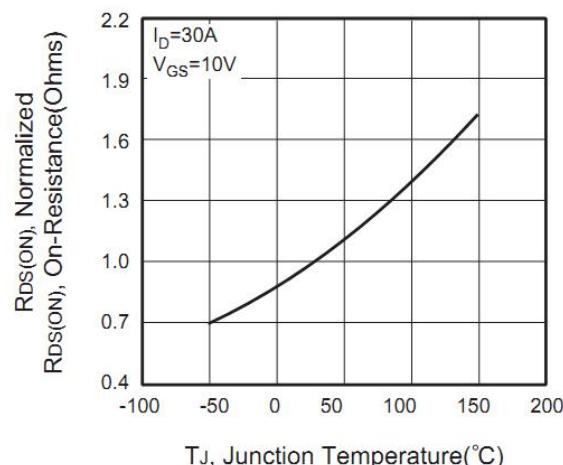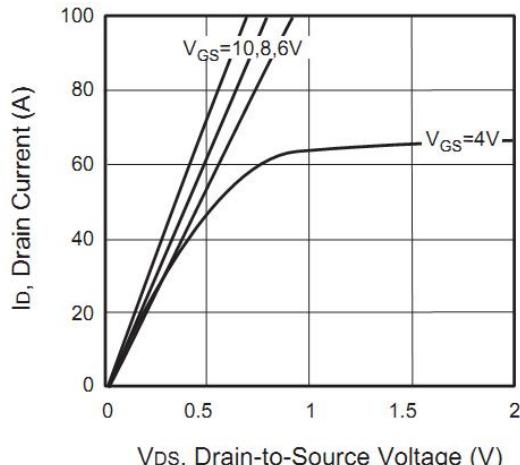


桂林斯壯桂微電子有限責任公司
GSME Guilin Strong Micro-Electronics Co.,Ltd.

GMW70N03S

■DIMENSION 外形封裝尺寸

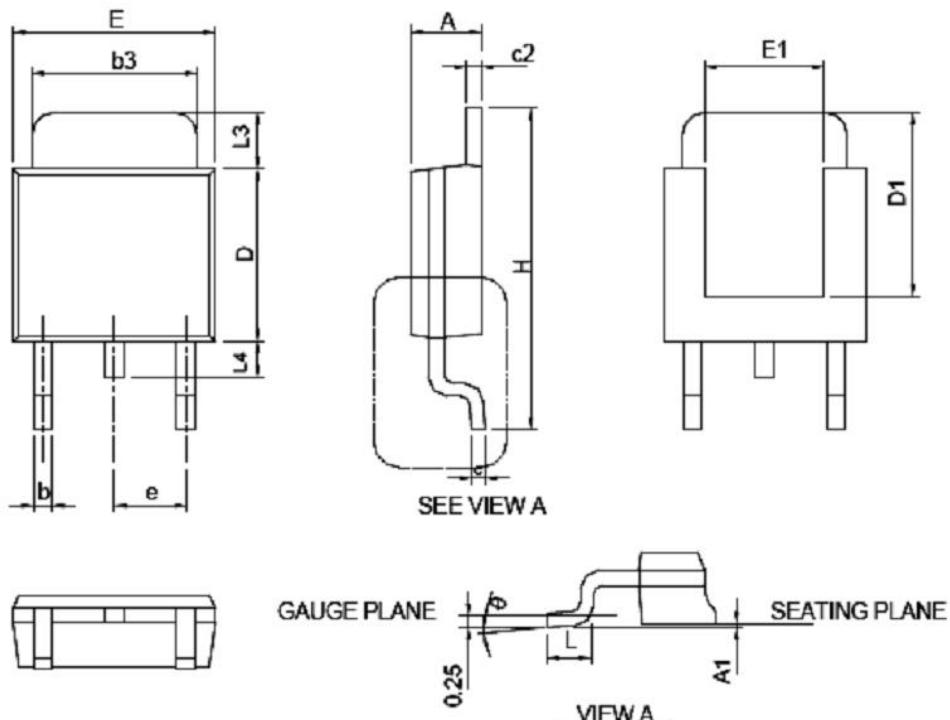

SYMBOL	TO-252			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	2.18	2.39	0.086	0.094
A1		0.13		0.005
b	0.50	0.89	0.020	0.035
b3	4.95	5.46	0.195	0.215
c	0.46	0.61	0.018	0.024
c2	0.46	0.89	0.018	0.035
D	5.33	6.22	0.210	0.245
D1	4.57	6.00	0.180	0.236
E	6.35	6.73	0.250	0.265
E1	3.81	6.00	0.150	0.236
e	2.29 BSC		0.090 BSC	
H	9.40	10.41	0.370	0.410
L	0.90	1.78	0.035	0.070
L3	0.89	2.03	0.035	0.080
L4		1.02		0.040
O	0°	8°	0°	8°