

### N-channel 30V, DFN5\*6-8 MOSFET N-溝道場效應管

#### ■ Features 特點

Low on-resistance and maximum DC current capability 低導通電阻和最大直流電流能力

Super high density cell design 超高元胞密度設計

$R_{DS(ON)}=4.3\text{m}\Omega(\text{TYP}) @ VGS=10\text{V}$

$R_{DS(ON)}=7.5\text{m}\Omega(\text{TYP}) @ VGS=4.5\text{V}$


#### ■ Applications 應用

Power Management in Notebook CPU Core 筆記本 CPU 電源管理

DC/DC Converter 直流/直流變換

Load Switch 負載開關應用

#### ■ Internal Schematic Diagram 內部結構

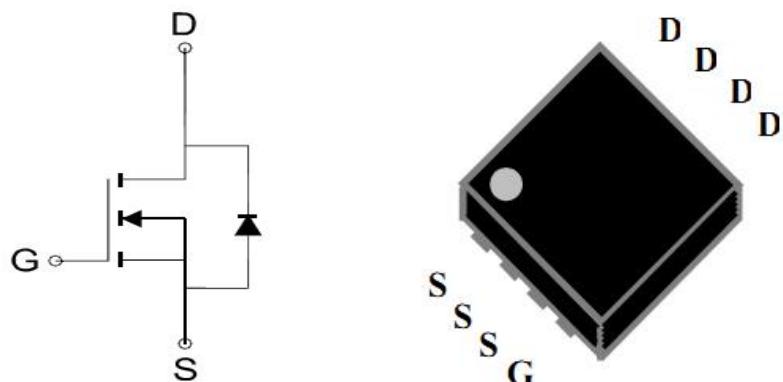

#### ■ Absolute Maximum Ratings 最大額定值


Characteristic 特性參數	Symbol 符號	Rating 頂定值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	$BV_{DSS}$	30	V
Gate- Source Voltage 柵極-源極電壓	$V_{GS}$	$\pm 20$	V
Drain Current (continuous) 最大連續電流	$I_D$ (at $TC = 25^\circ\text{C}$ )	65	A
Drain Current (pulsed) 漏極電流-脈冲	$I_{DM}$	150	A
Total Device Dissipation 總耗散功率	$P_{TOT}$ (at $TC = 25^\circ\text{C}$ )	60	W
Thermal Resistance Junction-Case 热阻	$R_{eJC}$	2.1	$^\circ\text{C}/\text{W}$
Junction/Storage Temperature 結溫/儲存溫度	$T_J, T_{stg}$	-55~150	$^\circ\text{C}$

■ Electrical Characteristics 電特性

( $T_A=25^\circ\text{C}$  unless otherwise noted 如無特殊說明，溫度為  $25^\circ\text{C}$ )

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓( $I_D=250\mu\text{A}, V_{GS}=0\text{V}$ )	$\text{BV}_{\text{DSS}}$	30	—	—	V
Gate Threshold Voltage 柵極開启電壓( $I_D=250\mu\text{A}, V_{GS}=V_{DS}$ )	$V_{GS(\text{th})}$	1	1.6	2.5	V
Zero Gate Voltage Drain Current 零柵壓漏極電流( $V_{GS}=0\text{V}, V_{DS}=30\text{V}$ )	$I_{\text{DSS}}$	—	—	1	$\mu\text{A}$
Gate Body Leakage 柵極漏電流( $V_{GS}=\pm 20\text{V}, V_{DS}=0\text{V}$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 静态漏源導通電阻( $I_D=30\text{A}, V_{GS}=10\text{V}$ ) ( $I_D=20\text{A}, V_{GS}=4.5\text{V}$ )	$R_{DS(\text{ON})}$	—	4.3 7.5	6 12	$\text{m}\Omega$
Diode Forward Voltage Drop 內附二極管正向壓降( $I_{SD}=1\text{A}, V_{GS}=0\text{V}$ )	$V_{SD}$	—	—	1	V
Input Capacitance 輸入電容 ( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{ISS}$	—	2200	—	pF
Common Source Output Capacitance 共源輸出電容( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{OSS}$	—	300	—	pF
Reverse Transfer Capacitance 反向傳輸電容 ( $V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$ )	$C_{RSS}$	—	200	—	pF
Total Gate Charge 總柵極電荷密度 ( $V_{DS}=15\text{V}, I_D=20\text{A}, V_{GS}=4.5\text{V}$ )	$Q_g$	—	23	—	nC
Gate Source Charge 柵源電荷密度 ( $V_{DS}=15\text{V}, I_D=20\text{A}, V_{GS}=4.5\text{V}$ )	$Q_{gs}$	—	5	—	nC
Gate Drain Charge 柵漏電荷密度 ( $V_{DS}=15\text{V}, I_D=20\text{A}, V_{GS}=4.5\text{V}$ )	$Q_{gd}$	—	12	—	nC
Turn-On Delay Time 開啟延遲時間 ( $V_{DS}=15\text{V}, I_D=15\text{A}, R_{\text{GEN}}=3\Omega, V_{GS}=10\text{V}$ )	$t_{d(\text{on})}$	—	13	—	ns
Turn-On Rise Time 開啟上升時間 ( $V_{DS}=15\text{V}, I_D=15\text{A}, R_{\text{GEN}}=3\Omega, V_{GS}=10\text{V}$ )	$t_r$	—	20	—	ns
Turn-Off Delay Time 關斷延遲時間 ( $V_{DS}=15\text{V}, I_D=15\text{A}, R_{\text{GEN}}=3\Omega, V_{GS}=10\text{V}$ )	$t_{d(\text{off})}$	—	43	—	ns
Turn-On Fall Time 開啟下降時間 ( $V_{DS}=15\text{V}, I_D=15\text{A}, R_{\text{GEN}}=3\Omega, V_{GS}=10\text{V}$ )	$t_f$	—	14	—	ns

■DIMENSION 外形封裝尺寸

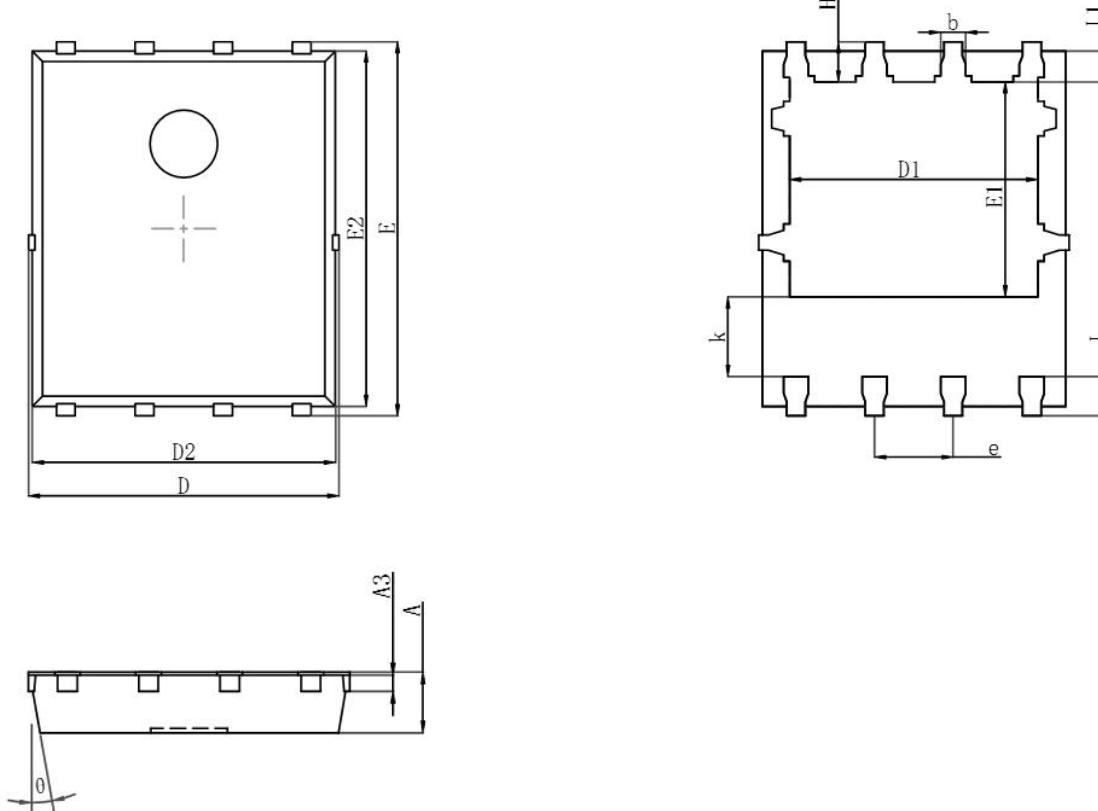

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.000	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.944	5.096	0.195	0.201
E	5.974	6.126	0.235	0.241
D1	3.910	4.110	0.154	0.162
E1	3.375	3.575	0.133	0.141
D2	4.824	4.976	0.190	0.196
E2	5.674	5.826	0.223	0.229
k	1.190	1.390	0.047	0.055
b	0.350	0.450	0.014	0.018
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	10°	12°	10°	12°